


MSH5-DSAB-DCCB1A - Digital Sensor Alarm, Hand-held, 9V battery operated, LED and Buzzer outputs (battery and sensor sold separately), 6' Female M12 Micro Cable for sensor connection

Our Digital Sensor Alarms provide both visual and audible notification when an attached digital sensor output is triggered*. The meter can be paired with Hall Effect or Magneto-resistive sensors and used to scan for magnetic fields; or it can be paired with ferrous metal detection sensors to detect ferrous targets.

The MSH5-DSAB-DCCB1A is a hand-held unit that operates from a 9V battery and provides 5V to power the attached sensor. An M12 Micro Female Connector on a 6' cable mates to a wide variety of sensors available from Sensor Solutions.

The digital sensor alarm can also be provided in a wall mountable enclosure for permanent installation with a variety of connection options. Contact Sensor Solutions to discuss our sensor and meter options and determine the best complete sensor solution for your application.

*NOTE: Output Trigger is dependent on sensor type and may indicate a magnetic or ferrous target is introduced or removed. Contact us for details or to determine which sensor is best for your application.

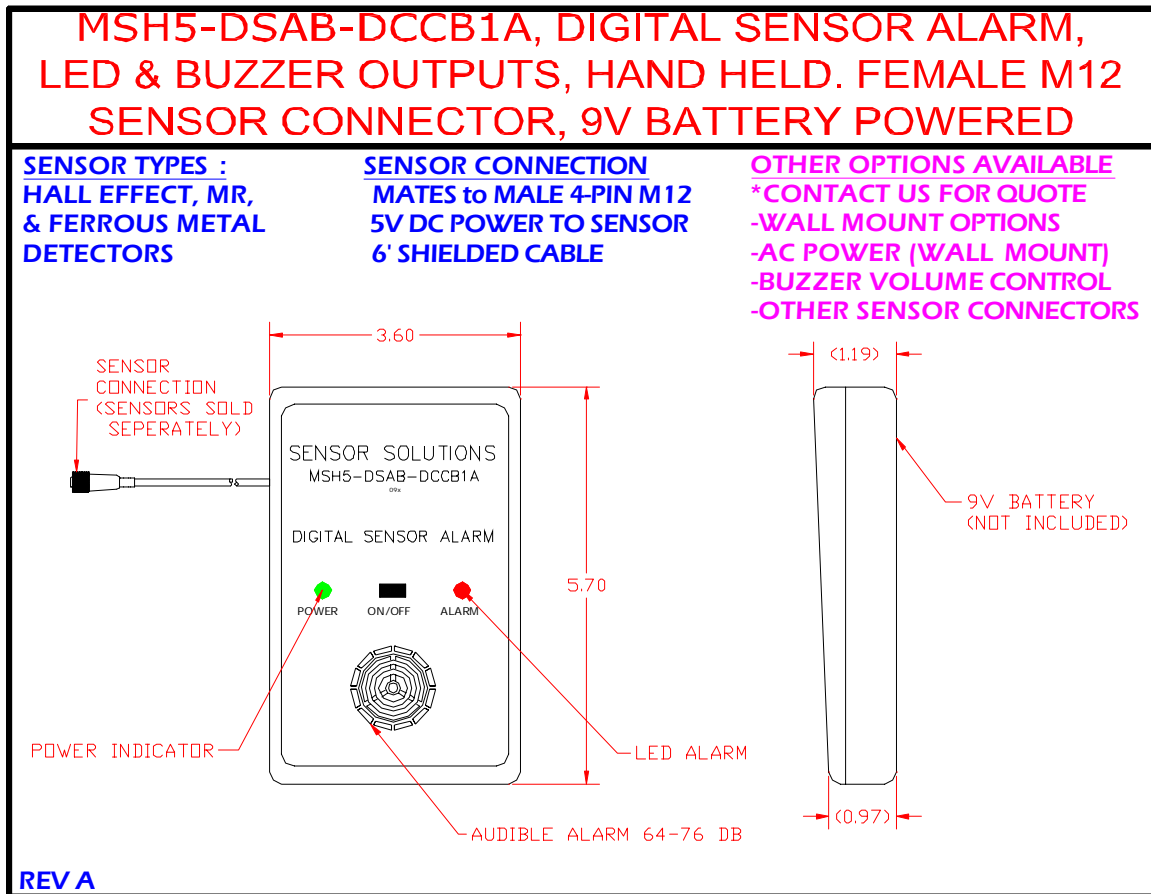

SENSOR CONNECTION

